

NOTICE TO MARINERS



Notice of works associated with construction activities on Seagreen Offshore Wind Farm

| | | | |
|---------------|------------|---------------|---------|
| Date of Issue | 13/03/2022 | Notice Number | 05/2022 |
|---------------|------------|---------------|---------|

Seagreen Offshore Wind Farm – Inter Array Cable Wet Stow Coordinates.

Contact Details for Marine Coordination and Fisheries Liaison

The following contact can provide more information if required:

| | |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Telephone Number, 24/7 | +44 (0) 333 344 5255 |
| Duty Marine Coordinator | seagreenmarinecoordination@sse.com |
| Address | Seagreen Wind Energy Ltd, Inchbraoch House Montrose Port Authority, South Quay Ferryden, Montrose, Angus DD10 9SL. |

Fisheries liaison is coordinated by Brown and May Marine Ltd. For all fisheries enquiries, John Watt is primary contact:

| | |
|------------------|-----------------------------------------------------------------------------------------------|
| Telephone Number | +44 (0) 1379872144 |
| Mobile number | +44 (0) 7590 880746 |
| Email | John.Watt@Brownmay.com |
| Address | Brown and May Marine Progress Way Mid Suffolk Business Park Eye, Suffolk IP23 7HU |

1. Area of planned activity.

Two inter array cable ends have been wet stowed within the Seagreen offshore wind farm site boundary. The coordinates are listed below in table 1 and shown in figs 1 & 2.

| Wet stow cable end | Latitude (DDM WGS 84) | Longitude (DDM WGS 84) |
|--------------------|-----------------------|------------------------|
| OSP – J15 | 56° 34.472' N | 1° 46.328' W |
| N14 – Q14 | 56° 37.038' N | 1° 43.796' W |

NOTICE TO MARINERS

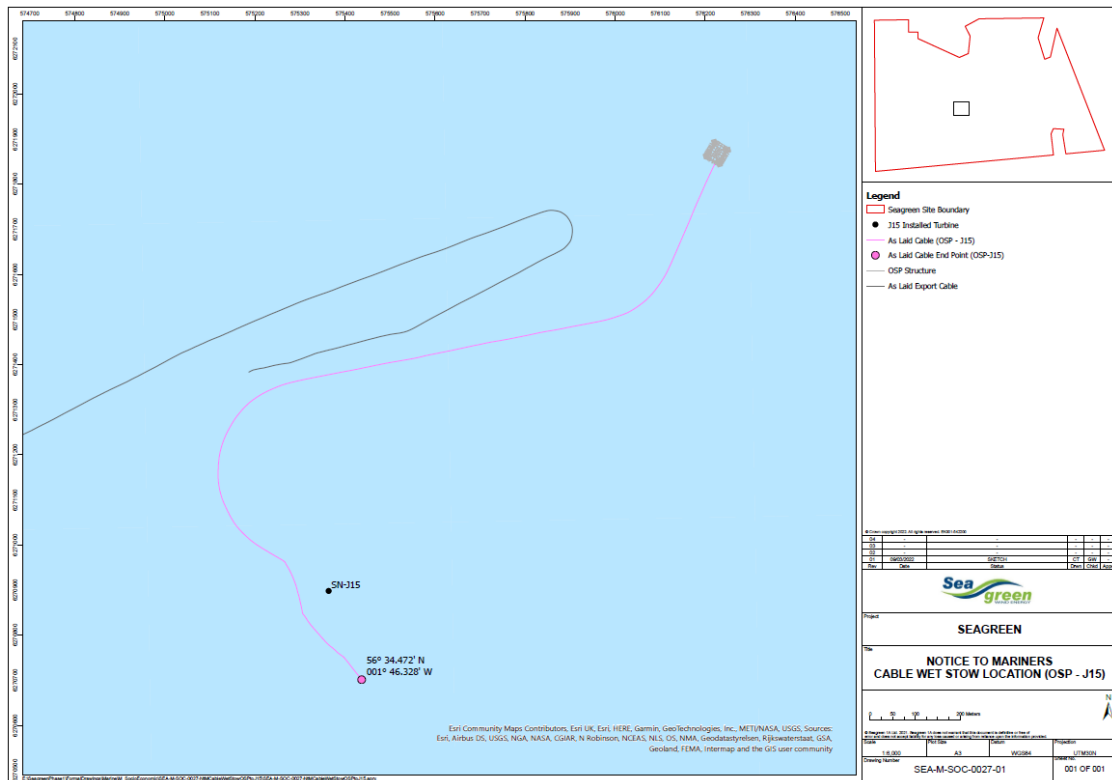


Fig 1 – OSP-J15 cable end location

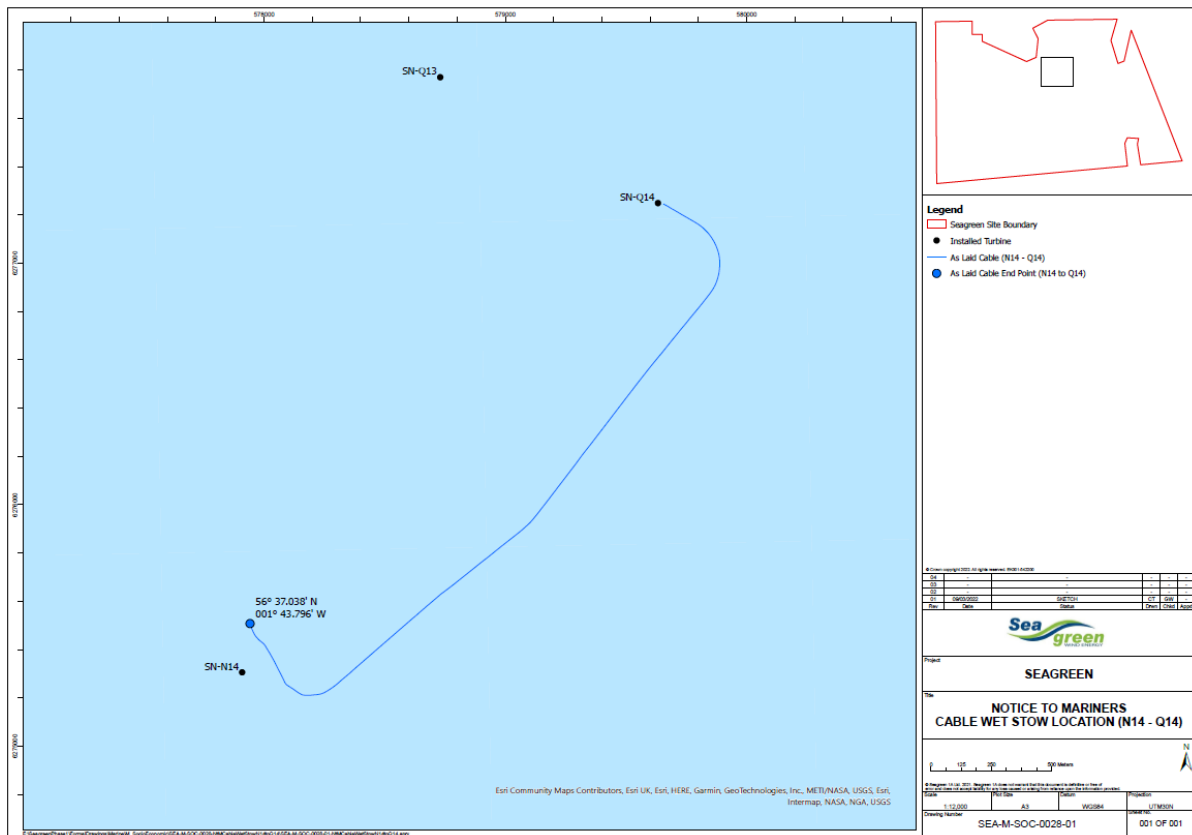


Fig 2 – N14-Q14 cable end location

2. Activity Description.

During inter-array cable installation activities two inter-array cable ends have been wet stowed in the coordinates listed in table 1 and shown in figs 1 & 2.

These cable ends will be pulled into the wind turbine generator foundation structures SN-J15 and SN-N14 at a date to be confirmed.

The cable ends are secured in position by the mooring arrangement show below in fig 3. The clump weigh & recovery rigging is no higher than a few meters from the seabed with no wires or ropes coming up to the surface.

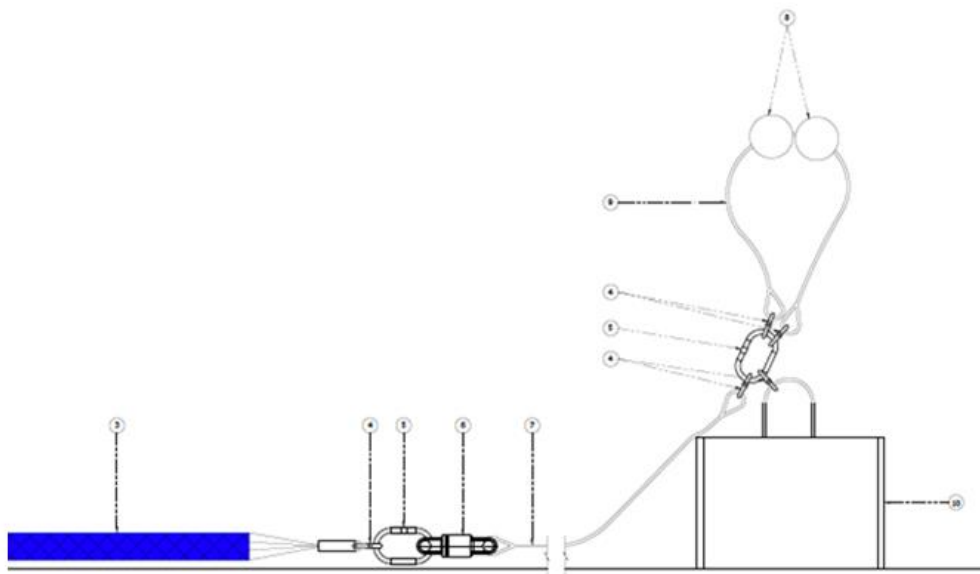


Fig 3 – Cable end mooring arrangement

3. General Safety Advice

All vessels involved in construction activities will exhibit appropriate lights and day-time shapes prescribed by the International Regulations for Preventing Collisions at Sea, relative to operations. The vessel will also transmit an Automatic Identification System (AIS) message.

4. Safety Zones

Following consideration by Scottish government ministers it has been agreed that during the construction phases of the Seagreen development mandatory rolling 500m safety zones will be established around each Wind Turbine Generator and/or their foundations whilst construction works are in progress, as indicated by the presence of a construction vessel. The safety zones will be triggered whenever a vessel is on station at a WTG and undertaking construction activities.

In addition, mandatory pre commissioning 50m safety zones will be established around each Wind Turbine Generator and/or their foundations when construction works have been completed but prior to Wind Farm commissioning or where construction works have only been partially completed. These safety zones will be active at any structure during the construction phase where a construction vessel is not present at a Wind Turbine Generator.

NOTICE TO MARINERS



MARINERS ARE REMINDED to navigate with caution and keep continued watch on VHF Ch.70/16 when navigating the area.

5. Distribution List

A central list of recipients is maintained by the Marine Coordinator; if you are not the appropriate recipient of these notices, or do not wish to receive the notices in the future, please contact us at the address shown in this notice.